


Werkstattbuch Nr. 69	FuSE 62 (FMG 39T)	E 01-12
-------------------------	-------------------	---------

Anlagen-Schaltplan FuSE 62A
(hierzu: Blatt E 01-14)

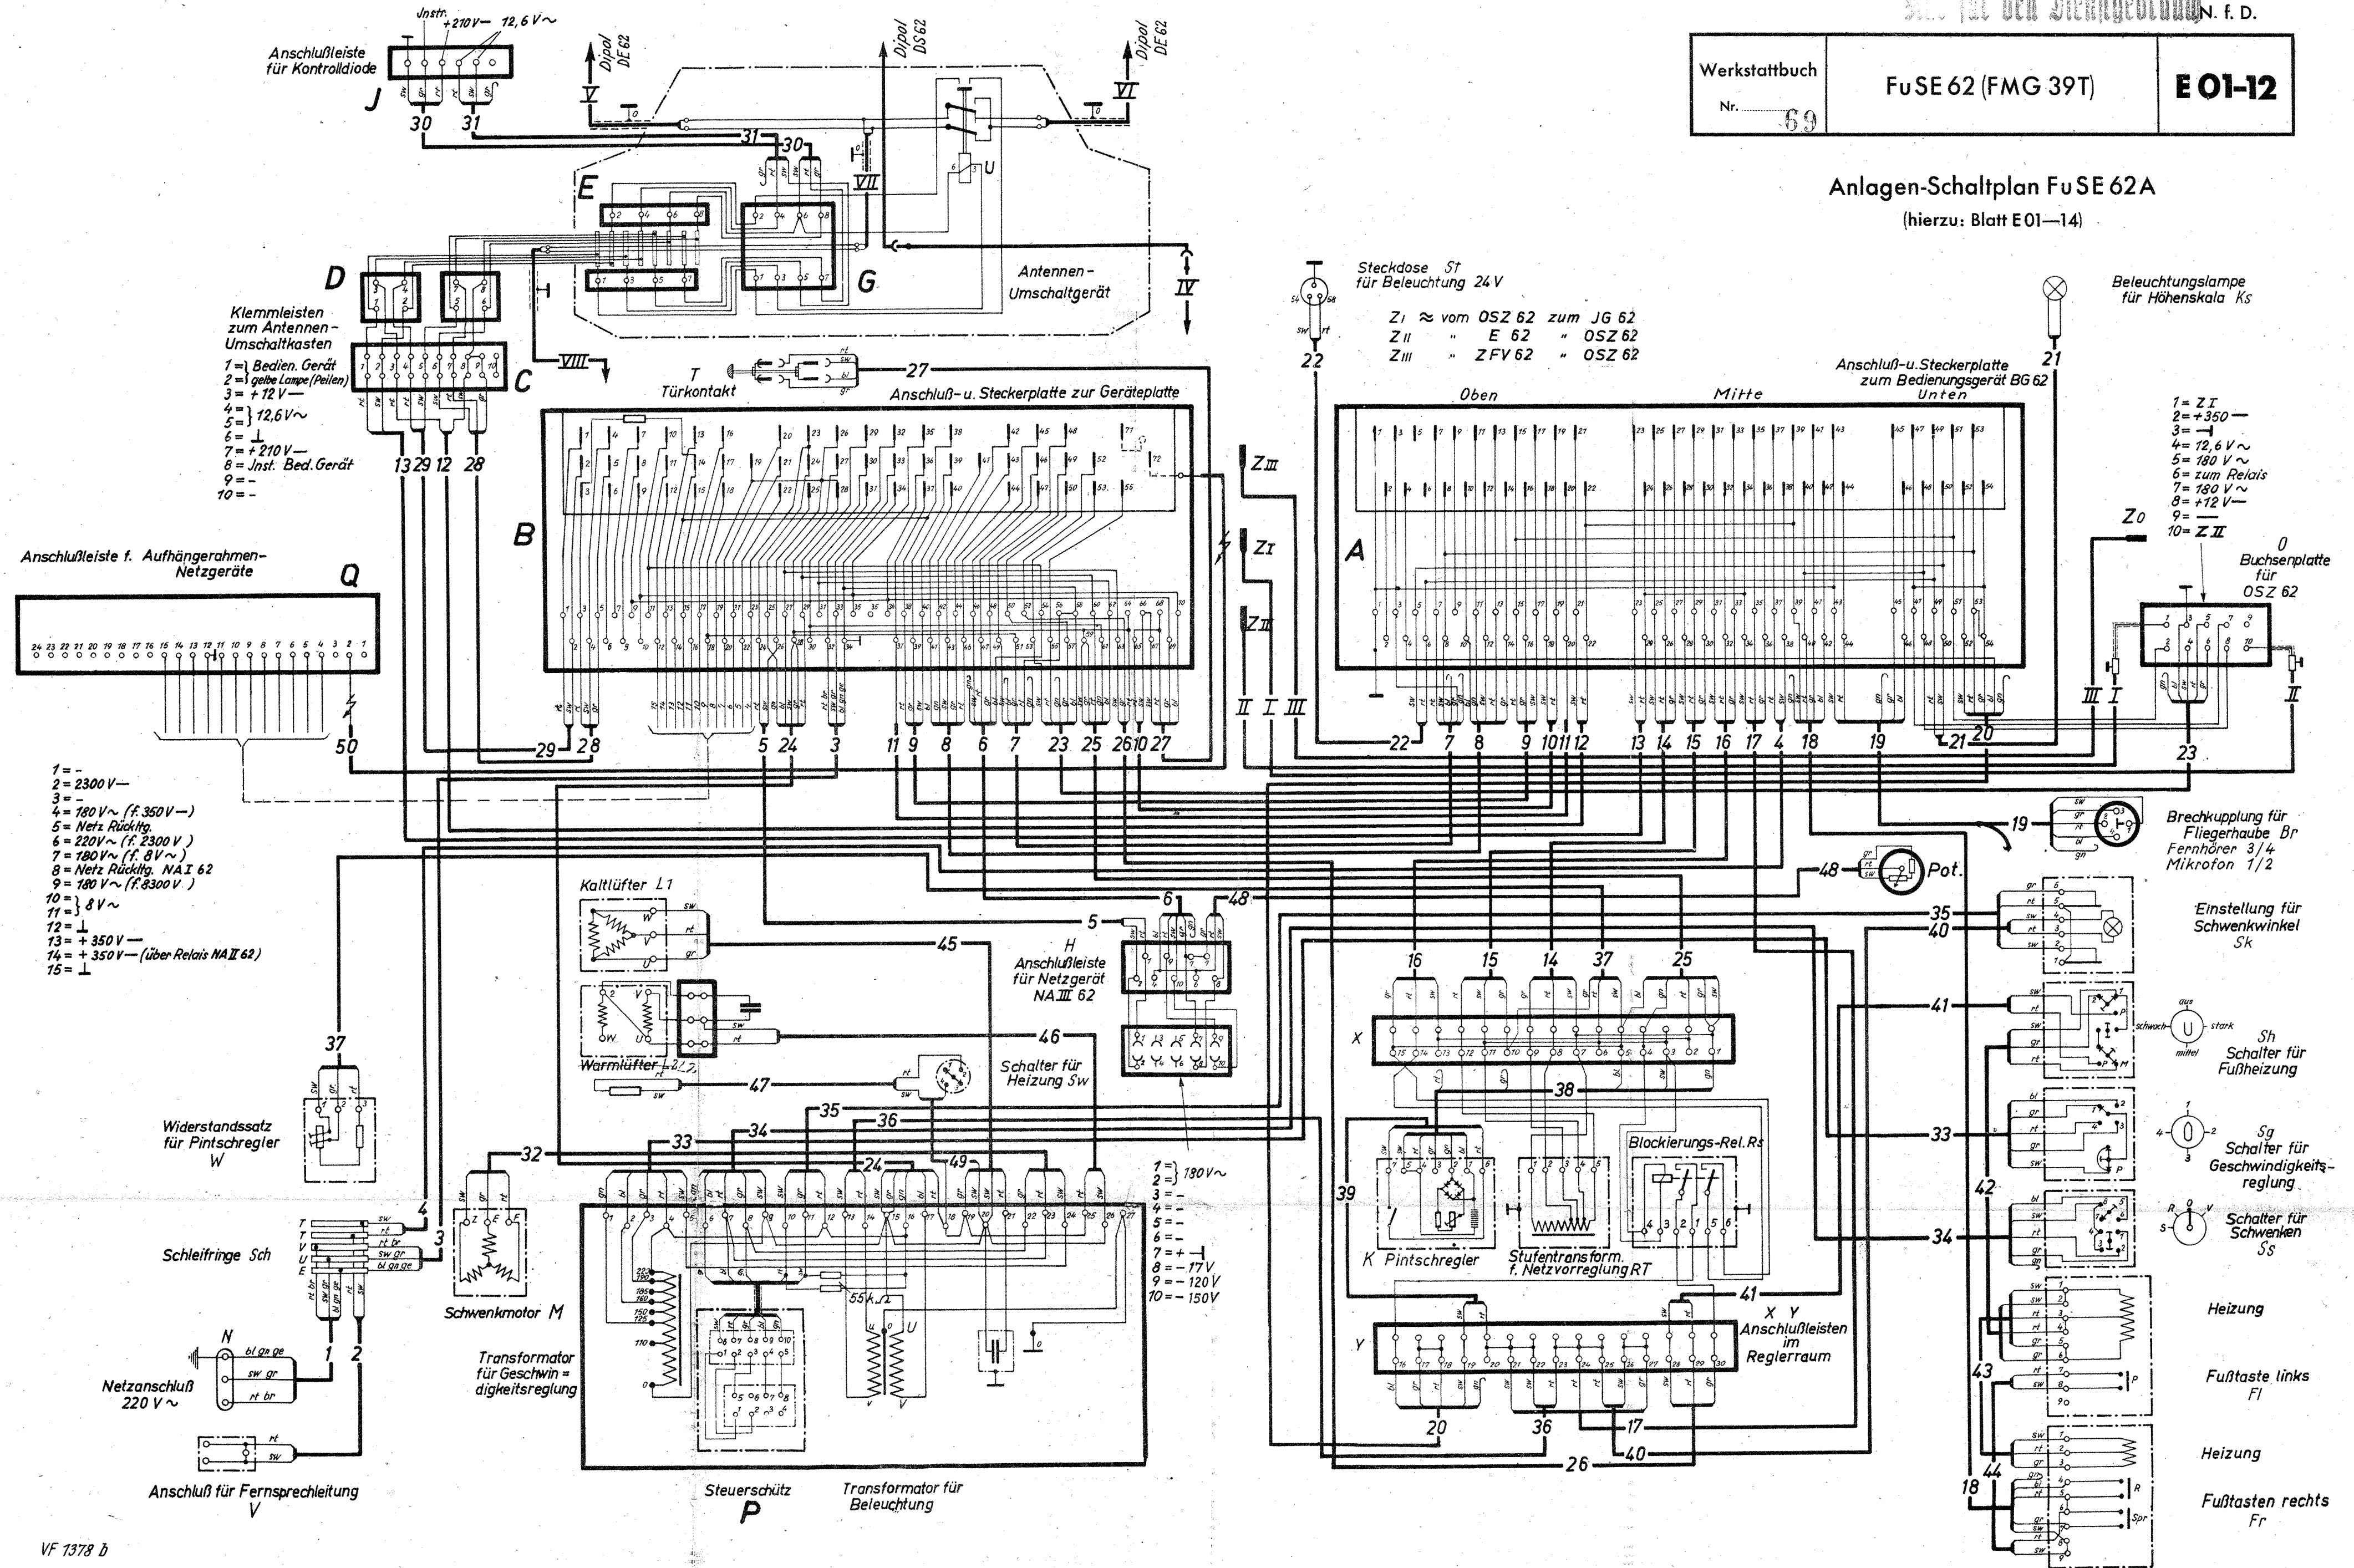

Steckdose ST für Beleuchtung 24V
 Z I ≈ vom OSZ 62 zum JG 62
 Z II " E 62 " OSZ 62
 Z III " ZFV 62 " OSZ 62

1 = Z I
 2 = +350 -
 3 = -
 4 = 12,6V ~
 5 = 180V ~
 6 = zum Relais
 7 = 180V ~
 8 = +12V -
 9 = -
 10 = Z II

1 = -
 2 = 2300V -
 3 = -
 4 = 180V ~ (f. 350V -)
 5 = Netz Rücktg.
 6 = 220V ~ (f. 2300V)
 7 = 180V ~ (f. 8V ~)
 8 = Netz Rücktg. NA I 62
 9 = 180V ~ (f. 8300V)
 10 = 8V ~
 11 = -
 12 = -
 13 = +350V -
 14 = +350V - (über Relais NA II 62)
 15 = -

1 = 180V ~
 2 = -
 3 = -
 4 = -
 5 = -
 6 = -
 7 = + -
 8 = -17V
 9 = -120V
 10 = -150V